

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**L.1023**

(09/2020)

SERIES L: ENVIRONMENT AND ICTS, CLIMATE  
CHANGE, E-WASTE, ENERGY EFFICIENCY;  
CONSTRUCTION, INSTALLATION AND PROTECTION  
OF CABLES AND OTHER ELEMENTS OF OUTSIDE  
PLANT

---

**Assessment method for circular scoring**

Recommendation ITU-T L.1023



ITU-T L-SERIES RECOMMENDATIONS

**ENVIRONMENT AND ICTS, CLIMATE CHANGE, E-WASTE, ENERGY EFFICIENCY; CONSTRUCTION,  
INSTALLATION AND PROTECTION OF CABLES AND OTHER ELEMENTS OF OUTSIDE PLANT**

<b>OPTICAL FIBRE CABLES</b>	
Cable structure and characteristics	L.100–L.124
Cable evaluation	L.125–L.149
Guidance and installation technique	L.150–L.199
<b>OPTICAL INFRASTRUCTURES</b>	
Infrastructure including node elements (except cables)	L.200–L.249
General aspects and network design	L.250–L.299
<b>MAINTENANCE AND OPERATION</b>	
Optical fibre cable maintenance	L.300–L.329
Infrastructure maintenance	L.330–L.349
Operation support and infrastructure management	L.350–L.379
Disaster management	L.380–L.399
<b>PASSIVE OPTICAL DEVICES</b>	L.400–L.429
<b>MARINIZED TERRESTRIAL CABLES</b>	L.430–L.449

*For further details, please refer to the list of ITU-T Recommendations.*

## Recommendation ITU-T L.1023

### Assessment method for circular scoring

#### Summary

Recommendation ITU-T L.1023 outlines an assessment method for circularity scoring of information and communication technology (ICT) goods.

The assessment method consists of three steps:

- 1) Setting the relevance and applicability (R) of each criterion for circular product design (CCPD) for the ICT goods at hand,
- 2) Assess the margin of improvement (MI) of each criterion,
- 3) Calculate the circularity score (score) from 0 to 100% for the ICT good at hand for all three circular design guideline groups (CDGGs). This includes:
  - Using a predefined value matrix to identify the % score from 0 to 100 for each combination of R×MI.
  - Average the included criteria for the ICT good at hand separately for all three groups: product durability, ability to recycle, repair, reuse, and upgrade from equipment and manufacturer level.

#### History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T L.1023	2020-09-22	5	<a href="http://handle.itu.int/11.1002/1000/14301">11.1002/1000/14301</a>

#### Keywords

Circularity score, criteria, ICT goods, product durability, recycling, repair, reuse, upgrade.

\* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2020

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

## Table of Contents

	<b>Page</b>
1 Scope .....	1
2 References.....	1
3 Definitions .....	1
3.1 Terms defined elsewhere .....	1
3.2 Terms defined in this Recommendation .....	2
4 Abbreviations and acronyms .....	2
5 Conventions .....	3
6 Background.....	3
7 The methodology .....	4
7.1 Step 1 – Estimate the relevance (R) of each guideline to the product at hand .....	6
7.2 Step 2 – Evaluation of the margin of improvement (MI) for a product design.....	7
7.3 Step 3 – Calculating the circularity score (Score) of the product.....	13
Appendix I – Examples of application of the methodology .....	16
I.1 Gateway example .....	16
I.2 Server example .....	21
Appendix II – Rationale for scoring tables .....	22
Appendix III – Additional groups and criteria which may be relevant for certain ICT goods.....	24
Bibliography.....	25



# Recommendation ITU-T L.1023

## Assessment method for circular scoring

### 1 Scope

Realization of the circular economy requires incorporating elements in product design that support the reduction of material use, reuse, recycling and recovery of products, product parts, components and materials to circulate them in the value chain for as long as possible. This Recommendation contains a three-step methodology to identify an information and communication technology (ICT) good's circularity in three dimensions via three circular design guideline groups (CDGGs): first the ICT good durability, second the ICT good ability to be recycled, repaired, reused and upgraded, and third the manufacturers ability to recycle, repair, reuse and upgrade the ICT good put into the market. The three guideline groups are then divided into criteria for circular product design. These criteria are then assessed at four levels, both from how well circularity has been achieved, the margin of improvement, and the relevance and applicability of each criterion for the ICT good at hand. The margin of improvement (MI) score and relevance score are then combined and translated into a score for each criterion. The average of applicable criteria in each guideline group are calculated as the total circularity score for each guideline group.

No weighting of the guideline groups is included.

### 2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T L.1015] Recommendation ITU-T L.1015 (2019), *Criteria for evaluation of the environmental impact of mobile phones*.  
<https://www.itu.int/rec/T-REC-L.1015-201905-I>
- [ITU-T L.1020] Recommendation ITU-T L.1020 (2018), *Circular economy: Guide for operators and suppliers on approaches to migrate towards circular ICT goods and networks*.  
<https://www.itu.int/rec/T-REC-L.1020-201801-I>
- [ITU-T L.1021] Recommendation ITU-T L.1021 (2018), *Extended producer responsibility – Guidelines for sustainable e-waste management*.  
<https://www.itu.int/rec/T-REC-L.1021-201804-P>
- [ITU-T L.1022] Recommendation ITU-T L.1022 (2019), *Circular economy: Definitions and concepts for material efficiency for information and communication technology*.  
<https://www.itu.int/rec/T-REC-L.1022-201910-I>

### 3 Definitions

#### 3.1 Terms defined elsewhere

This Recommendation uses the following terms defined elsewhere:

**3.1.1 ICT goods** [b-ITU-T L.1410]: Tangible goods deriving from or making use of technologies devoted to or concerned with:

- the acquisition, storage, manipulation (including transformation), management, movement, control, display, switching, interchange, transmission or reception of a diversity of data;
- the development and use of the hardware, software, and procedures associated with this delivery; and
- the representation, transfer, interpretation, and processing of data among persons, places, and machines, noting that the meaning assigned to the data is preserved during these operations.

NOTE – [b-ETSI TS 103 199] used the word "equipment" instead.

**3.1.2 component** [b-ETSI TR 103 679]: Part of a product that cannot be taken apart without destruction or impairment of its intended use.

**3.1.3 product part** [b-ETSI TR 103 679]: Sub-unit of a product.

NOTE – HDD is an example of a product part within a computer.

**3.1.4 upgrade** [b-EN 45554]: Process of enhancing the functionality, performance, capacity or aesthetics of a product.

**3.1.5 reliability** [b-EN 45552]: Probability that a product functions as required under given conditions, including maintenance, for a given duration without limiting event.

**3.1.6 refurbishment** [b-EN 45553]: Functional and/or aesthetic restoration of an energy-related product.

**3.1.7 material** [b-ETSI TR 103 679]: Substance or mixture of substances within a product or product part.

**3.1.8 substance** [b-ETSI TR 103 679]: Chemical element and its compounds in the natural state or obtained by any production process, including any additive necessary to preserve the stability of the product and any impurity deriving from the process used, but excluding any solvent which may be separated without affecting the stability of the declarable substance or changing its composition.

**3.1.9 product** [b-ETSI TR 103 679]: Good or service.

### **3.2 Terms defined in this Recommendation**

This Recommendation defines the following terms:

**3.2.1 circular economy:** An economy closing the loop between different life cycles through design and corporate actions/practices that enable recycling and reuse in order to use raw materials, goods and waste in a more efficient way. The circular economy concept distinguishes between technical and biological cycles, the circular economy is a continuous, positive development cycle. It preserves and enhances natural capital, optimises resource yields, and minimizes system risks by managing finite stocks and renewable flows, while reducing waste streams.

NOTE – Definition adapted from [ITU-T L.1022] and [ITU-T L.1020].

**3.2.2 priority part:** A part having a high likelihood of needing repair, replacement or upgrading.

## **4 Abbreviations and acronyms**

This Recommendation uses the following abbreviations and acronyms:

CS	Circularity Score
CDGG	Circular Design Guideline Group
CCPD	Criterion for Circular Product Design
CE	Circular Economy



CRM	Critical Raw Material
DfD	Design for Disassembly
DfR	Design for Recycling
DfRe	Design for Remanufacturing
DfX	Design for X
EEE	Electrical and Electronic Equipment
HDD	Hard Disc Drive
ICT	Information and Communication Technology
LCA	Life Cycle Assessment
MI	Margin of Improvement
MR	Material Recycling
PD	Product Durability
R	Relevance
RFP	Request for Procurement
sEEE	Small household electrical and electronic equipment
3RUe	Ability to Recycle, Reuse, Refurbish and Upgrade, equipment level
3RUm	Ability to Recycle, Reuse, Refurbish and Upgrade, manufacturer level

## 5 Conventions

Colours are used in the appendices of this Recommendation to graphically indicate circularity scores ranging from green (very good) to red (very bad).

## 6 Background

The principles of circular economy (CE) emphasize optimizing resource yields at all stages of a product's lifecycle [b-ITU-T L.Sup.28], [ITU-T L.1015], [ITU-T L.1021], [ITU-T L.1022].

CE ultimately aims to make products without causing or incentivizing additional extraction of Earth's resources. This means using recycled and renewable material, prioritizing efficient use of materials and recovery of wastes, designing products to be durable to maximize their useful life and finally, where necessary, contributing materials back to the market for making new products.

This requires incorporating elements in product design that support the reduction of material use, reuse, recycling, and recovery of products, product parts, components and materials to circulate them in the value chain for as long as possible. To achieve this objective, criteria for circular product design (CCPDs) that aim to reduce, reuse, recycle and recover should be considered, and corresponding design guidelines integrated from the early stages of product design.

To date, in ITU-T the standardization of implementation of CE principles has largely focused on waste management models, such as integrating extended producer responsibilities [ITU-T L.1021] into business practices, rather than evaluating criteria and proposing design guidelines to incorporate circular elements into product design. Multiple design for X (DfX) approaches exist including design for disassembly (DfD), design for recycling (DfR), and design for remanufacturing (DfRe).

The present methodology incorporates some selected parameters of the CENELEC series of product material efficiency standards [b-CENELEC].

Moreover, the present methodology also differs from the product circularity indicator [b-PCI].

However, the methodology outlined in this Recommendation is not to be confused with methods which aim to measure circularity from a materials flow and organizational perspectives, such as those under development by the Ellen MacArthur Foundation [b-EMF] or the World Business Council for Sustainable Business [b-WBCSD].

While not all criteria described in this Recommendation might work for all ICT good categories, they are applicable to improve ICT good circularity if they are applied at the early stage of product design.

Therefore, this Recommendation is intended to be a guideline and methodology for designers of ICT goods and systems to align product design to the most relevant criteria and incorporate design guidelines. This use of this Recommendation can result in increased circularity of ICT goods.

## 7 The methodology

The methodology contains a three-step approach to support product designers in determining the most relevant criteria to be incorporated in their product design. Bovea and Pérez-Belis [b-Bovea] proposed which existing DfX guidelines are most relevant in product design from a circular economy perspective for small household electrical and electronic equipment (EEE). [b-AndraeVaija] proposed a new method based for ICT goods inspired by [b-Bovea]. These DfX guidelines proposed by [b-Bovea] and used for ICT goods by [b-AndraeVaija], are then reorganized and adopted further to the specificities of ICT goods based on CE principles as shown in Table 1, adapted from Table I in [b-AndraeVaija]. Additional criteria have been added and several have been removed compared to the original lists [b-Bovea], [b-AndraeVaija] in order to align with metrics included in the CENELEC product material efficiency standards [b-CENELEC] and EPEAT [b-EPEAT] and to reflect the variety of products in the ICT industry.

Noticeably, the far-left column of Table 1 – Groups – contains a list of circular principles that put all the criteria into different groups. The description of each group is as follows:

- 1) Product durability (PD): It includes criteria related to promoting the life span and durability of products by adapting their design and studying the possibility of upgrading software to a new version and service support by ensuring the product can be used for as long as possible by the first user or subsequent users.
- 2) Ability to recycle, repair, reuse, upgrade (3RUe) – equipment level: It includes criteria related to the product's structure and access to its priority parts for repair, connecting systems to facilitate disassembly and reassembly, spare parts, diagnostic and information availability. It relates to:
  - Possibilities to refurbish the ICT good;
  - Possibilities to reuse product parts and components within the ICT good (after first use) in refurbishment of similar or other ICT goods;
  - Facilitate the identification, separation and recycling of materials. Addresses separate collection of products for better recycling and development of designated recycling technologies.
- 3) Ability to recycle, repair, reuse, upgrade (3RUm) – manufacturer level:  
It includes criteria related to the manufacturer ability (on company level) to facilitate recycling, repair, reuse and upgrade. These requirements are not directly connected to the equipment, but to the infrastructure and support to be developed or supported by the manufacturer. It relates to:
  - Availability of service support in terms of information, infrastructure and spare parts.

In summary, each group contains a set of criteria that directly address the group's topic. Each criterion is also assigned to a code with the group's initials followed by a numerical number.

The proposed method is in principle unlimited regarding the number of groups and criteria. For example, new criteria for scratch resistance for example for metals, glass, etc. can be added and margin of improvement (MI) levels defined. Also new groups can be added accordingly. Appendix III contains an example of a potential new criterion for 3RUe.

**Table 1 – Circular design guidelines groups and criteria for circular product design of relevance for circular ICT**

Group	Code	Criteria
Product durability	PD1	Software and data support
	PD2	Scratch resistance
	PD3	Maintenance support
	PD4	Robustness
	PD5	Battery for portable ICT goods
	PD6	Data security
Ability to recycle, repair, reuse, upgrade – equipment level	3RUe1	Fasteners and connectors
	3RUe2	Diagnostic support
	3RUe3	Material recycling compatibility
	3RUe4	Disassembly depth
	3RUe5	Recycled/renewable plastics
	3RUe6	Material identification
	3RUe7	Hazardous substances
	3RUe8	Critical raw materials
	3RUe9	Packaging recycling
Ability to recycle, repair, reuse, upgrade – manufacturer level	3RUm1	Service offered by manufacturer
	3RUm2	Spare parts distribution
	3RUm3	Spare parts availability
	3RUm4	Disassembly information
	3RUm5	Collection and recycling programmes
	3RUm6	Environmental footprint assessment knowledge available to improve the equipment material efficiency

The proposed methodology involves three main steps that shall be followed:

- 1) The first step is to estimate the relevance (R) of each criterion to the ICT good or ICT system (e.g., mobile site) at hand based on relevance characteristic such as customer relevance or life cycle assessment (LCA) calculation.
- 2) The second step involves determining the margin of improvement (MI) of each criterion based on the degree to which the criterion is met. (See Table 4 for guidance on how to determine MI for each criterion) for the ICT good category.

NOTE – The order of steps 1 and 2 is somewhat flexible. The determination of MI can be done separately from the one for R. For example, for request for procurement (RFP) it works well if the telco operators determine the R and the manufacturers determine the MI.

3) The third step involves calculating the circularly score (score) for each group of the product at hand.

Through the third step it will be possible to determine the criteria most critical for improving the ICT good circularity.

The following clauses give a detailed description of each step. Appendix I reports example applications of the assessment methodology.

### 7.1 Step 1 – Estimate the relevance (R) of each guideline to the product at hand

The level of relevance (R) might appear somewhat ambiguous as there are many criteria/viewpoints which can be used to determine relevance. However, if the viewpoint is clearly set, defining R is not difficult.

R evaluates the degree of relevance of each criterion for a product category according to its function, life span, durability, performance, etc. R is defined based on four grades (see Table 2) and the option to set R to 0 when a criterion is not applicable to the product under investigation. The R of a criterion is considered *HIGH* when the significance (i.e., to the customer, to the cost, to the environment, the LCA score, etc.) of incorporating the aspects included in that group is essential when taking into account the tasks, life span, durability, performance, etc. features that characterize the product category to which the product belongs. Conversely, the R of the criterion is considered *LOW*. *Very HIGH* and *Very LOW* are the highest and lowest R grades, respectively.

In summary, R for each criterion given in Table 1 can be identified in a number of ways. One way is to assess R based on customer preferences (See examples in Appendix I.).

**Table 2 – Description of levels of relevance (R) of guidelines**

Code	Grade of R	Description when taking into account the functions, life span, durability, performance, etc. of the product category.
R4	Very HIGH {4}	The positive effect (for customer, environment etc.) of the criterion at hand will be <i>VERY HIGH</i> . NOTE – For example, gateways could have R=4 for 3RUe1 as easily removable and reusable fasteners enable a cost-effective refurbishing business model giving a positive economic and green benefit.
R3	HIGH {3}	The positive effect (for customer, environment, etc.) of incorporating the guidelines for the criterion at hand will be <i>HIGH</i> .
R2	LOW {2}	The positive effect (for customer, environment, etc.) of incorporating the guidelines for the criterion at hand will be <i>LOW</i> . NOTE – For example, gateways could have R=2 for 3RUM4 as disassembly information is not essential for end user.
R1	Very LOW {1}	The positive effect (for customer, environment, etc.) of incorporating the guidelines for the criterion at hand will be <i>Very LOW</i> . NOTE – For example, keyboards could have R=1 for PD6 as these devices usually do not store data that is considered to be private and needs secure data deletion.

**Table 2 – Description of levels of relevance (R) of guidelines**

R0	Not applicable {0}	The criterion is not applicable to the product at hand. NOTE – A zero rating will result in the category not being included. This can be useful when the category cannot be applied, e.g., PD5 (Battery for portable goods) is not applicable to stationary products or products without batteries.
----	--------------------	--

R will be closely linked to the type of ICT good and the business model.

## 7.2 Step 2 – Evaluation of the margin of improvement (MI) for a product design

This step is to evaluate the margin of improvement (MI) of a specific criterion found in Table 1 for a product design.

MI evaluates the level of compliance of the criteria. It assesses to what extent a product design has incorporated circular design into the product.

MI is defined based on four grades (Table 3). If a certain criterion is not met, the MI of that product design will be *very High*, and grade 4 will be assigned. Conversely, if a product design fully meets the criterion, the MI will be *very Low*, and grade 1 will be assigned. The lower the MI, the higher possibility of a better score.

**Table 3 – Description of MI levels for each criterion**

Code	Grade of MI	Description
MI4	Very HIGH {4}	The criterion is not met in the product design. The MI of that aspect will be Very HIGH.
MI3	HIGH {3}	The criterion is slightly met in the product design. The MI of that aspect will be HIGH.
MI2	LOW {2}	The criterion is fairly met in the product design. The MI of that aspect will be LOW.
MI1	Very LOW {1}	The criterion is fully met in the product design. The MI of that aspect will be VERY LOW.

Table 4 gives guidance for identification and setting of MI levels. The values in the column "Scoring system (1-4) examples" are to be considered as examples that are only valid for a certain type of product (e.g., disassembly depth for home network gateways for 3RUe4 in Table I.2). Each MI level shall refer to entities which are verifiable and/or measurable.

**Table 4 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)
Product durability	PD1: Software and data support	Availability of software and firmware updates &	MI = 1 – Software and firmware updates and upgrades availability can be categorized as long-term (class A, i.e., for a duration of time that reflects the expected maximum useful life of the product, cf. [b-EN 45554]).

**Table 4 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)
		upgrades	<p>MI = 2 – Software and firmware updates and upgrades availability can be categorized as mid-term (class B, i.e., for a duration of time that reflects the expected average useful life of the product, cf. [b-EN 45554]).</p> <p>MI = 3 – Software and firmware updates and upgrades availability can be categorized as short-term availability (class C, i.e., available during a period of two years after the time of sale of the product, cf. [b-EN 45554]).</p> <p>MI = 4 – No information on duration of availability (class D, cf. [b-EN 45554]) is provided on software and firmware updates and upgrades availability.</p>
	PD2: Scratch resistance	Resistance of housing parts subject to be scratched	<p>MI = 1 – Plastic scratch resistance equal or greater than 2H regarding [b-ASTM D3363 – 05].</p> <p>MI = 2 – Plastic scratch resistance equal or greater than H regarding [b-ASTM D3363 – 05].</p> <p>MI = 3 – Plastic scratch resistance equal or greater than HB regarding [b-ASTM D3363 – 05].</p> <p>MI = 4 – Plastic scratch resistance lower or equal to B regarding [b-ASTM D3363 – 05].</p>
	PD3: Maintenance support	Availability of consumables, wear-out parts expected to be replaced periodically Availability of maintenance infrastructure	<p>MI = 1 – Consumables and wear-out parts expected to be replaced periodically can be categorized as publicly available (class A in [b-EN 45554]) or as available to independent maintenance service providers (class B in [b-EN 45554]).</p> <p>MI = 2 – Consumables and wear-out parts expected to be replaced periodically can be categorized as available to manufacturer-authorized maintenance service providers (class C in [b-EN 45554]).</p> <p>MI = 3 – Consumables and wear-out parts expected to be replaced periodically can be categorized as available to the manufacturer only (class D in [b-EN 45554]).</p> <p>MI = 4 – Consumables and wear-out parts expected to be replaced periodically can be categorized as not available (class E in [b-EN 45554]). No maintenance infrastructure are offered by manufacturer.</p>
	PD4: Robustness	<p><b>Examples of standard which can be considered.</b> NEMA Rating for Enclosures or IP Class according to [b-IEC 60529]. Drop test according to [b-IEC 60068-2-31] or [b-MIL-STD-810G] Method 516.7. Temperature endurance test according to [b-IEC 60068-2-1] Cold/Heat or [b-MIL-STD-810G] Method 501.6 and 502.6.</p>	<p>To be assessed depending on selected standards and type of equipment. NOTE – See Gateway example Table I.3.</p> <p>For most of these standards, the MI level is either 1 or 4 as they are pass/fail standards.</p> <p>NEMA rating for enclosures or IP classes need to be judged depending on the assessed product as not all products need the highest levels of ingress protection.</p>

**Table 4 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)	
		[b-ITU-T K.21] Recommendation (last version) for 'Enhanced' levels. [b-IEC 61960-3] Electrical test acceptance criteria. Battery protection software. Earthquake testing according to GR-3108-CORE.		
	PD5: Battery for portable ICT goods	Battery longevity for portable ICT goods. [b-IEC 62620] may be applicable to measure capacity.	<p>MI = 1 for Li: Battery pack is chargeable to &gt;80% of its original design capacity after 300 cycles.</p> <p>MI = 2 for Li: Battery pack is chargeable to &gt;70% of its original design capacity after 300 cycles.</p> <p>MI = 3 for Li: Battery pack is chargeable to &gt;60% of its original design capacity after 300 cycles.</p> <p>MI = 4 for Li: Battery pack is chargeable to &lt;60% of its original design capacity after 300 cycles.</p>	
	PD6: Data security	Data management: Personal data to be deleted without compromising the functionality of the device. NOTE – The classification can be undertaken in alignment with [b-EN 45554]	<p>MI = 1 – Personal data can be erased, and password can be reset by user. Features are built-in and easily accessible. Note – <i>MI</i>=1 can be selected also when no personal data is stored on the device assessed.</p> <p>MI = 2 – Personal data can be erased, or password can be reset with external software, freely available solutions.</p> <p>MI = 3 – Erasure of personal data and password reset is possible on request using services of the manufacturer.</p> <p>MI = 4 – Neither the personal data nor password can be manipulated by the user.</p>	
	Ability to Recycle, Repair, Reuse, upgrade – equipment level	3RUe1: Fasteners and connectors	Fasteners, connectors and tools used to disassemble parts that are likely to need replacement during the expected lifetime of the product are reusable/removable per [b-EN 45554]	MI = 1 – Fasteners and connectors can be categorized as reusable (class A, i.e., an original fastening system that can be completely re-used, or any elements of the fastening system that cannot be re-used are supplied with the new part for a repair, re-use or upgrade process, cf. [b-EN 45554]) and using no tools, basic tools or product specific tools (classes A-C as defined in [b-EN 45554]).
				MI = 2 – Fasteners and connectors can be categorized as removable (class B, i.e., an original fastening system that is not reusable, but can be removed without causing damage or leaving residue which precludes reassembly (in case of repair or upgrade) or re-use of the removed part (in case of re-use) for a repair, re-use or upgrade process, cf. [b-EN 45554]) and using no tools, basic tools or product specific tools (classes A-C as defined in [b-EN 45554]).
				MI = 3 – Fasteners and connectors can be categorized as removable or reusable using proprietary tools.
MI = 4 – Fasteners and connectors can be categorized as neither removable nor reusable (class C, i.e., an original fastening system which is neither removable				

**Table 4 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)
			nor reusable, as defined as in MI = 1 and MI = 2, for a repair, re-use or upgrade process, cf. [b-EN 45554]).
	3RUe2: Diagnostic support	Diagnostic support classification by necessary interface	<p>MI = 1 – Interface can be categorized as an intuitive interface (Class A) – cf. [b-EN 45554].</p> <p>MI = 2 – Interface can be categorized as a coded interface with public reference table (Class B) or as a publicly available hardware / software interface (Class C) – cf. [b-EN 45554].</p> <p>MI = 3 – Interface can be categorized as a proprietary interface (Class D) – cf. [b-EN 45554].</p> <p>MI = 4 – Diagnostic is not possible with any type of interface (Class E) – cf. [b-EN 45554].</p>
	3RUe3: Material recycling compatibility	Materials compatibility for joint recycling	<p>MI = 1 – All of the following requirements shall be fulfilled;</p> <p>1) plastic parts &gt;25g do not contain metal inlets or fasteners that are moulded, heat or ultrasonically inserted or glued-in and cannot be separated by breaking off from the plastic part or with commonly available tools.</p> <p>2) Plastic parts &gt;100g do not have an adhesive, coating, paint or finish that is not compatible with recycled. Note – Plastic parts with &gt;25% post-consumer recycled content and printed-circuit boards are exempt. Requirement does not apply to parts where such measures are required for safety, legal or technical requirements.</p> <p>3) Plastic parts &gt;25g are comprised of a single resin or combination of resins compatible for recycling and are separable by hand or with commonly available tools from other plastic parts &gt;25g and not compatible for joint recycling.</p> <p>NOTE – Printed circuit boards, wires and cables, connectors, electronic, optical, acoustic, ESD and EMI components are excluded.</p> <p>MI = 2 – Two of the requirements specified for MI = 1 are fulfilled.</p> <p>MI = 3 – One of the requirements specified for MI = 1 is fulfilled.</p> <p>MI = 4 – None of the requirements specified for MI = 1 is fulfilled.</p>
	3RUe4: Disassembly depth	Number of steps necessary to reach the priority parts	To be assessed depending on selected standards and type of equipment. NOTE – See Appendix I for an example.
	3RUe5: Recycled/renewable plastics	Use of pre- or post-consumer recycled plastics Note – Refers to plastics used in the ICT good itself.	<p>MI = 1 – Total content of recycled and biobased plastics 75-100%.</p> <p>MI = 2 – Total content of recycled and biobased plastics 50-75%.</p> <p>MI = 3 – Total content of recycled and biobased plastics 25-50%.</p> <p>MI = 4 – Total content of recycled and biobased plastics 0-25%.</p>
	3RUe6: Material identification	Materials identification according to ISO 11469.	<p>MI = 1 – Markings to identify base materials as per [b-ISO 11469], [b-ISO 1043-1] (plastics), [b-ISO 1629] (rubbers) [b-ISO 18064] (thermoplastic elastomers), as well as fillers and reinforcing materials (ISO 1043-2), plasticizers (ISO 1043-3) and flame retardants (ISO 1043-4)</p> <p>MI = 2 – Markings to identify base materials as per [b-ISO 11469], [b-ISO 1043-1] (plastics), [b-ISO 1629] (rubbers) and [b-ISO 18064] (thermoplastic elastomers)</p> <p>MI = 3 – Markings to identify plastics as per [b-ISO 11469] and [b-ISO 1043-1].</p> <p>MI = 4 – No markings to identify materials on any part.</p>



**Table 4 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)
3RUe7: Hazardous substances	Reduction of bromine and chlorine		<p>MI = 1 – Each plastic part in the product exceeding 0.5 g shall not contain greater than 1000ppm chlorine or greater than 1000 ppm bromine at the homogeneous level [b-IEEE 1680.1]. Test methods such as IEC 62321-3-1 and 62321-3-2 are recommended. [b-IEEE 1680.1].</p> <p>NOTE – Parts which exceed 25% post-consumer recycled content may contain a maximum of 5000 ppm chlorine and a maximum of 5000 ppm bromine [b-IEEE 1680.1]. Power cords – in jurisdictions where PVC-free power cords have not been approved by safety agencies for use in the product – are exempted. [b-IEEE 1680.1].</p>
			<p>MI = 2 – Each plastic part in the product exceeding 25g shall not contain greater than 1000ppm chlorine or greater than 1000ppm bromine at the homogeneous level. [b-IEEE 1680.1].</p> <p>NOTE – Parts which exceed 25% post-consumer recycled content may contain a maximum of 5000 ppm chlorine and a maximum of 5000 ppm bromine. [b-IEEE 1680.1]. Printed circuit boards, cables and wiring, fans and electronic components are excluded. [b-IEEE 1680.1].</p>
			<p>MI = 3 – Parts exceed the concentrations of 1000ppm chlorine or 1000ppm bromine, but the manufacturer has carried out a hazard assessment and no viable alternative substances have been identified. [b-IEEE 1680.1].</p> <p>Note – Notes as for MI = 1 and MI = 2 apply here as well.</p>
			<p>MI = 4 – The bromine and chlorine based substances content is unknown.</p>
3RUe8: Critical Raw Materials	Declaration of Critical Raw Materials Content. NOTE – CRMs are different for each region. Examples of defined CRM include L.1100 and the list of CRM for the EU [b-EU-CRM]. Each product has to choose the appropriate CRM list.		<p>MI = 1 – Based on the CRM content assessment, design efforts have been carried out to substitute CRM and the results have been published.</p>
			<p>MI = 2 – An assessment according to EN 45558 has been carried out on all of the CRMs present in the product.</p>
			<p>MI = 3 – Indicative weight range assessment of at least two CRMs present in the product. Note – Example for servers in Table I.7.</p>
			<p>MI = 4 – The CRM content is unknown.</p>
3RUe9: Packaging recycling	Material recycling aspects included in the packaging		<p>MI = 1 – All the aspects of material efficiency are considered for the packaging, by fulfilling all of the following four requirements:</p> <ol style="list-style-type: none"> <li>1) Elimination of elemental chlorine as a bleaching agent used to bleach virgin or recovered fibres subsequently used in product packaging,</li> <li>2) Elimination of the use of expanded polystyrene in product packaging,</li> <li>3) Packaging is designed in a way that it allows reuse or recovery in alignment with [b-EN 13429] and [b-EN 13430],</li> <li>4) Sum of the concentrations of intentionally added lead, cadmium, mercury and hexavalent chromium present in any packaging component (e.g., wrapping, box, cover, pallet, metal clips etc.) shall not exceed 100 ppm by weight.</li> </ol>
			<p>MI = 2 – Two or three of the requirements for MI = 1 for packaging material efficiency are fulfilled.</p>
			<p>MI = 3 – One of the requirements for MI = 1 for packaging material recycling is fulfilled.</p>
			<p>MI = 4 – None of the requirements for MI = 1 for packaging material recycling is fulfilled.</p>

**Table 4 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)
Ability to Recycle, Repair, Reuse, upgrade – manufacturer level	3RUm1: Service offered by manufacturer	Duration of Repair, Reuse, upgrade services	MI = 1 – RRU service availability can be categorized as long-term (class A, i.e., a repair, re-use or upgrade service, which the manufacturer offers for a duration of time that reflects the expected durability of the product, cf. [b-EN 45554]). NOTE – Expected durability is the time a customer (the user of the ICT good) can expect the product to last (in its generation) before the next generation is entering the market.
			MI = 2 – RRU service availability can be categorized as mid-term (class B, i.e., a repair, re-use or upgrade service, which the manufacturer offers for a duration of time that reflects the expected durability of the product, cf. [b-EN 45554]). NOTE – Expected average durability includes warranty returns and other early failures and is therefore lower than expected durability.
			MI = 3 – RRU service availability can be categorized as short-term (class C, i.e., a repair, re-use or upgrade service, which the manufacturer offers for two years after the time of sale of the product, cf. [b-EN 45554]).
			MI = 4 – No RRU service availability is offered.
	3RUm2: Spare parts distribution	Availability of spare parts to different categories of persons/ organisations	MI = 1 – Spare parts are publicly available or available to independent repair service providers (Class A and Class B, as defined in [b-EN 45554]).
			MI = 2 – Spare parts are available to manufacturer-authorized repair service providers or available to the manufacturer only (Class C and Class D, as defined in [b-EN 45554]) in all the markets where the product is sold by the manufacturer.
			MI = 3 – Spare parts are available to manufacturer-authorized repair service providers or available to the manufacturer only (Class C and Class D, as defined in [b-EN 45554]) in limited markets where the product is sold by the manufacturer.
			MI = 4 – Spare parts are not available (Class E, as defined in [b-EN 45554]).
	3RUm3: Spare parts availability	Duration of spare parts availability	MI = 1 – Spare parts availability can be categorized as long-term (class A, i.e., a repair, re-use or upgrade process, for which the required spare part(s) is/are available for a duration of time that reflects the expected durability of the product category, cf. [b-EN 45554])
			MI = 2 – Spare parts availability can be categorized as mid-term (class B, i.e., repair, re-use or upgrade process, for which the required spare part(s) is/are available for a duration of time that reflects the expected average durability of the product, cf. [b-EN 45554]) Note – Average durability is lower than expected durability as the average takes into account the failure rate while the expected durability refers to the duration of the generation.
			MI = 3 – Spare parts availability can be categorized as short-term (class C, i.e., repair, re-use or upgrade process, for which the required spare part(s) is/are available during a period of two years after the time of sale of the product, cf. [b-EN 45554])
			MI = 4 – No information on duration of availability is provided for spare parts (class D, i.e., repair, re-use or upgrade process, for which the required spare part(s) is/are available at the time of sale, but for which the duration of availability cannot be determined, cf. [b-EN 45554]).
3RUm4: Disassembly	Classification of information availability by	MI = 1 – Information is publicly available (class A, i.e., repair, re-use or upgrade process, for which the relevant information is available to all interested parties, cf. [b-EN 45554]).	

**Table 4 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)
	information	comprehensiveness	MI = 2 – Information is available to independent repair service providers (class B, i.e., repair, re-use or upgrade process for which the relevant information is available to any self-employed professional, as well as any legally established organization, providing repair services, cf. [b-EN 45554]).
			MI = 3 – Information is available to manufacturer-authorized repair service providers (class C, i.e., repair, re-use or upgrade process, for which the relevant information is available to service providers authorized by the product manufacturer to offer repair services, cf. [b-EN 45554]).
			MI = 4 – Information is available to the manufacturer only (class D, i.e., repair, re-use or upgrade process, for which the relevant information is available to the product manufacturer, cf. [b-EN 45554]).
	3RUM5: Collection and recycling programmes	Participation of designated collection programs	MI = 1 – A designated collection program for refurbish, remanufacturing, repair and a designated selective, recycling program for specific parts of ICT goods (e.g., specific recycling process able to recover Germanium from optical fibre, Tantalum from Tantalum capacitors or Indium from LCD/OLED displays, etc.).
			MI = 2 – A designated collection program for refurbish, remanufacturing, repair and a designated recycling program exist for specific ICT goods (e.g., IT and telecommunications equipment for European WEEE handled by smelters to recovers precious metals).
			MI = 3 – A designated collection or a designated recycling program exist.
			MI = 4 – Neither designated collection nor designated recycling program exist.
	3RUM6: Environmental footprint assessment knowledge publicly available	Knowledge on the equipment environmental footprint	MI = 1 – An [b-ISO 14040] / [b-ISO 14044] or [b-ITU-T L.1410] compliant life cycle assessment (LCA) has been carried out on the ICT good and the results have been published.
			MI = 2 – A simplified environmental footprint assessment (e.g., screening LCA, environmental footprint assessment on one environmental indicator such as carbon footprint, etc.) has been carried out on the ICT good and the results have been published.
			MI = 3 – An environmental footprint assessment on a similar type of ICT good has been studied and the results have been published.
			MI = 4 – Neither an environmental footprint assessment have been done on the ICT good, nor an environmental footprint assessment on a similar type of equipment have been published.

### 7.3 Step 3 – Calculating the circularity score (Score) of the product

To identify the criteria that are most important to be incorporated into a product design, it is necessary to calculate the circularity score (score).

The values assigned to and used to calculate the score of an ICT good, which would allow designers to identify which groups listed in Table 1 are most important to be incorporated, more so than others in their product design in order to improve its circularity.

Once the R and MI values are decided following steps 1 and 2, it will be possible to calculate the score of an ICT good for each group using (1):

$$Score = R \times MI \quad (1)$$

For instance, if a product does not at all meet a criterion, then its MI is very high (Table 3). Therefore, a numerical value of 4 is assigned. If this criterion is very relevant, or belongs to a group that is very relevant for this product category/type, then the numerical value of 4 (Table 2) is assigned to R. In this case, the theoretical score for this product is  $4(R) \times 4(MI) = 16$ .

In another instance, if a product has slightly met a criterion, then its MI is high (Table 3). Therefore, a numerical value of 3 is assigned. If this criterion belongs to a group that is not at all relevant for this product category/type, then its R is very low and the numerical value of 1 (Table 2) is assigned. In this case, the theoretical score for this product is  $1(R) \times 3(MI) = 3$ .

However, the present method aims to reward circularly designed ICT goods with high % values and less circularly designed ICT goods with low % values.

NOTE – 0% is the worst score and 100% the best possible score.

This requires some development of the scoring as described in Appendix II and [b-AndraeVaija] – compared to the baseline method [b-Bovea].

Figure 1 shows the translation of R and MI combinations to values between 0% and 100%.

		R			
		1	2	3	4
MI	1	55	75	90	100
	2	50	60	70	80
	3	40	35	30	15
	4	25	20	10	0

L.1023(20)\_F01

**Figure 1 – Matrix with values for MI and R combinations**

With the score determined, it will then be possible to identify the criteria for improving a product's circularity. For instance, if the score of ICT good A is 0% in the PD category (i.e., Very High  $MI = 4$  and Very High  $R = 4$ ), it means that it is very urgent to redesign the product by improving the criteria (incorporating the corresponding guidelines) from the PD group found in Table 1. Conversely, if the score of ICT good A is 100% in the 3RUe group (i.e., Very Low  $MI$  and Very High  $R$ ), it means that no urgent action is needed to improve the product design from an 3RUe standpoint.

In addition, at this stage it is possible to review the list of criteria applied to the ICT good. Indeed, some of them might not be relevant ( $R = 0$ ), due to the ICT good design or business model, whereas some might be missing in order to describe the effort needed to improve its circularity. For example, for an ICT good that will undergo a refurbishment process during its lifespan it could be interesting to consider the scratch resistance (PD2) of the housing parts, as they might be reused as spare parts. This exercise is carried out on a gateway (see Table I.4).

The scale used by the score assessment method represents the level of circularity for a particular product design (including manufacturer services) and the urgency to incorporate different criteria. They are graded differently depending on the average *Score* at *Group* level.

These average total scores on group level are obtained by calculating the average of the scores for the criteria contained in the group.

For instance, the PD contains six criteria. Again, PD1, PD2,...PD6 are obtained by finding the scores between 0 and 100 for each R×MI combination in Figure 1. Thus, the average score for PD is equal to:  $\frac{PD1+PD2+PD3+PD4+PD5+PD6}{6}$ . Non-relevant criteria shall be removed from the average calculation. For example, if PD6 is not relevant, the average score for PD is equal to:  $\frac{PD1+PD2+PD3+PD4+PD5}{5}$ .

The scores obtained by the assessment method in the present document provides designers a clue of a product's circularity performance, allowing them to improve the criteria and groups that have the lowest scores.

Table 5 shows how e.g., a designer or system engineer may interpret the score for each group.

**Table 5 – The level of urgency of score for each group**

Circularity score in %	Urgency level explanation
81-100	Does not require any urgent actions
61-80	Does not require very urgent actions
41-60	Efforts should be made to improve, but not so urgent
21-40	It is urgent to improve
0-20	It is very urgent to improve

Appendix I illustrates an application of the present methodology to one ICT good.

## Appendix I

### Examples of application of the methodology

(This appendix does not form an integral part of this Recommendation.)

#### I.1 Gateway example

The following example applies the present three-step method to an ICT good – a gateway (Tables I.1 to I.6).

The scoring will be done according to the list of 21 criteria from Table 4 in the main body of the Recommendation. The groups and criteria are also displayed in Table I.1.

**Table I.1 – Empty table with the 21 criteria distributed in the three groups**

Equipment: Gateway Gen Z			
Circular Design Guidelines Group (CDGG)	Criteria	Relevance (R)	Margin of improvement (MI)
Product durability	PD1: Software and data support		
	PD2: Scratch resistance		
	PD3: Maintenance support		
	PD4: Robustness		
	PD5: Battery for portable ICT goods		
	PD6: Data security		
Ability to recycle, repair, reuse, upgrade - equipment level	3RUe1: Fasteners and connectors		
	3RUe2: Diagnostic support		
	3RUe3: Material recycling compatibility		
	3RUe4: Disassembly depth		
	3RUe5: Recycled/renewable plastics		
	3RUe6: Material identification		
	3RUe7: Hazardous substances		
	3RUe8: Critical raw materials		
	3RUe9: Packaging recycling		
Ability to recycle, repair, reuse, upgrade - manufacturer level	3RUm1: Service offered by manufacturer		
	3RUm2: Spare parts distribution		
	3RUm3: Spare parts availability		
	3RUm4: Disassembly information		
	3RUm5: Collection and recycling programmes		
	3RUm6: Environmental footprint assessment knowledge publicly available		

For each criterion the scoring is determined as follows:

– **Scoring for R:**

The type of equipment (i.e., a gateway), its business model (equipment rent to customers and recovered by the operator to be refurbished, sometimes several times during its lifespan), the results

of life cycle assessments (LCAs) on this type of equipment and the economic aspects (for example total cost of ownership) have been taken into account to assess the values for  $R$ .

For instance, all gateways will be refurbished several times during their lifecycle, thus it is critical to be able to disassemble them quickly. Thus  $R = 4$  (most relevant) for the criterion 3RUe4 regarding disassembly depth.

In contrast, as the operator owns the equipment and the customers have to return the equipment to the operator at the end of their subscription, the availability of spare parts to customers is not really relevant. The operator is in charge of all the repair and refurbishment operations, which are carried out by the equipment manufacturer or third party companies. Thus  $R = 1$  (least relevant) for the criterion 3RUm2 regarding spare parts distribution.

As the equipment does not contain any battery (be it primary or secondary ones) the criterion PD5 regarding battery longevity is irrelevant. Thus, for this gateway,  $R = 0$  for the criterion PD5. Hence, this criterion will no longer be mentioned in the following tables.

– Scoring for MI:

The scoring for MI is done according to the performance levels defined in the Table 4 of the Recommendation. However, for some of them the performance levels have to be defined at equipment type level, as the levels are very different from one equipment type to another.

For instance, Table I.2 shows the four levels of MI for the criterion 3RUe4 regarding disassembly depth.

**Table I.2 – Scoring example of criterion 3RUe4**

3RUe4: Disassembly depth	Number of steps necessary to reach priority parts	MI = 1 – All the priority parts for repair operations are accessible after one or two disassembly steps
		MI = 2 – All the priority parts for repair operations are accessible after three or four disassembly steps
		MI = 3 – All the priority parts for repair operations are accessible after five or six disassembly steps
		MI = 4 – All the priority parts for repair operations are accessible after more than six disassembly steps

For the gateway studied in this example the priority part for repair operation is the printed circuit board assembly. In order to be able to reach it, three operations have to be carried out:

- 1/ remove screws which fasten the top enclosure to the bottom enclosure;
- 2/ remove the top enclosure;
- 3/ remove the printed circuit board assembly which is fastened with two snap-fits (i.e., clips) on the bottom enclosure.

According to Table I.2, this performance level is equal to  $MI = 2$ .

The four levels of MI for PD4 regarding robustness are shown in Table I.3.

**Table I.3 – Scoring example of criterion PD4**

PD4: Robustness		MI = 1 – The product's design features better characteristics than the average ones for its product type for NEMA and IP Class. When applicable, it is also compliant with [b-MIL-STD-810H], [b-IEC 60068-2-31] and Recommendation ITU-T K..21 (last version) for "Enhanced" levels.
	<ul style="list-style-type: none"> <li>– Wear and damage resistance [b-MIL-STD-810H]</li> <li>– NEMA ratings for enclosures</li> <li>– IP Class</li> <li>– [b-IEC 60068-2-31] free fall standard</li> <li>– [b-ITU-T K.21] (last version) for "Enhanced" levels</li> </ul>	MI = 2 – The product's design features average characteristics for NEMA and IP Class regarding the product type. It does not comply with [b-MIL-STD-810H], [b-IEC 60068-2-31] or [b-ITU-T K.21] (last version) for "Enhanced" levels.
		MI = 3 – The product's design features worse characteristics than the average ones for its product type for NEMA and IP Class. It does not comply with [b-MIL-STD-810H], [b-IEC 60068-2-31] or [b-ITU-T K.21] (last version) for "Enhanced" levels.
		MI = 4 – The product's design features lowest possible NEMA or IP Class. It does not comply with [b-MIL-STD-810H], [b-IEC 60068-2-31] or [b-ITU-T K.21] (last version) for "Enhanced" levels.

For the studied gateway the NEMA and IP class are average for the product type and it does comply with [b-ITU-T K.21] for "enhanced" level. Thus, according to Table I.3, the performance level is equal to MI = 2.

Other criteria are calculated likewise to obtain the remaining R×MI pairs (Table I.4).

**Table I.4 – All applicable R and MI values for the gateway example**

Equipment: Gateway Gen Z			
Circular Design Guidelines Group (CDGG)	Criteria	Relevance (R)	Margin of improvement (MI)
Product Durability	PD1: Software and data support	4	1
	PD2: Scratch resistance	4	2
	PD3: Maintenance support	2	2
	PD4: Robustness	3	2
	PD6: Data security	2	2
Ability to Recycle, Repair, Reuse, Upgrade - equipment level	3RUe1: Fasteners and connectors	3	1
	3RUe2: Diagnostic support	4	3
	3RUe3: Material recycling compatibility	3	1
	3RUe4: Disassembly depth	4	2
	3RUe5: Recycled/renewable plastics	2	1
	3RUe6: Material identification	2	3
	3RUe7: Hazardous substances	3	2



**Table I.4 – All applicable R and MI values for the gateway example**

Equipment: Gateway Gen Z			
Circular Design Guidelines Group (CDGG)	Criteria	Relevance (R)	Margin of improvement (MI)
	3RUe8: Critical raw materials	2	4
	3RUe9: Packaging recycling	2	2
Ability to recycle, repair, reuse, upgrade - manufacturer level	3RUm1: Service offered by manufacturer	4	1
	3RUm2: Spare parts distribution	1	2
	3RUm3: Spare parts availability	4	1
	3RUm4: Disassembly information	1	3
	3RUm5: Collection and recycling programmes	2	2
	3RUm6: Environmental footprint assessment knowledge publicly available	3	3

Note that the criterion PD5: Battery is no longer mentioned in this table as this criterion is irrelevant for the studied product ( $R = 0$ ).

The score of each criterion is then calculated according to its  $R$  and  $MI$  results, combined with the matrix presented in Figure 1 ( $Score$  matrix with values for  $MI$  and  $R$  combinations). For instance, for the criterion 3RUe4 regarding disassembly depth according to the assessment carried out previously the results are  $R = 4$  (most relevant) and  $MI = 2$ . According to Figure 1 this combination of  $R$  and  $MI$  gives a score of 80.

The same process is applied to identify the scores of the other criteria, according to their  $R$  and  $MI$  results displayed in Table I.4. Table I.5 shows the results of these efforts.

**Table I.5 – Scores for all criteria**

Equipment: Gateway Gen Z	
Circularity score	Criteria
100	PD1: Software and data support
80	PD2: Scratch resistance
60	PD3: Maintenance support
70	PD4: Robustness
60	PD6: Data security
90	3RUe1: Fasteners and connectors
15	3RUe2: Diagnostic support
90	3RUe3: Material recycling compatibility
80	3RUe4: Disassembly depth
75	3RUe5: Recycled/renewable plastics
60	3RUe6: Material identification
70	3RUe7: Hazardous substances
20	3RUe8: Critical raw materials
60	3RUe9: Packaging recycling
100	3RUm1: Service offered by manufacturer

**Table I.5 – Scores for all criteria**

Equipment: Gateway Gen Z	
Circularity score	Criteria
50	3RUM2: Spare parts distribution
100	3RUM3: Spare parts availability
40	3RUM4: Disassembly information
60	3RUM5: Collection and recycling programmes
30	3RUM6: Environmental footprint assessment knowledge publicly available

The next step is to calculate the score at group level. These scores are obtained by calculating the average of the score for the criteria contained in the group.

For instance, the product durability group contains 6 criteria, but only 5 are relevant for the studied equipment. According to Table I.5 their scores are:

- PD1: 100
- PD2: 80
- PD3: 60
- PD4: 70
- PD6: 60

Thus, the score for product durability is equal to:  $\frac{100+80+60+70+60}{5} = 74$


NOTE – The criterion PD5 on battery longevity is not taken into account in the calculation.

Likewise, the scores for the other groups are calculated. Table I.6 shows the result.

**Table I.6 – Circularity score results for all groups**

Equipment: Gateway Gen Z	
Circularity score	Circular Design Guidelines Group (CDGG)
74	Product durability
62	Ability to recycle, repair, reuse, upgrade – equipment level
63	Ability to recycle, repair, reuse, upgrade – manufacturer level

A radar type chart can finally be used for a better graphical representation and help in understanding which group should be improved and the ones that already have good scores. Figure I.1 shows the results for the gateway studied in this appendix.

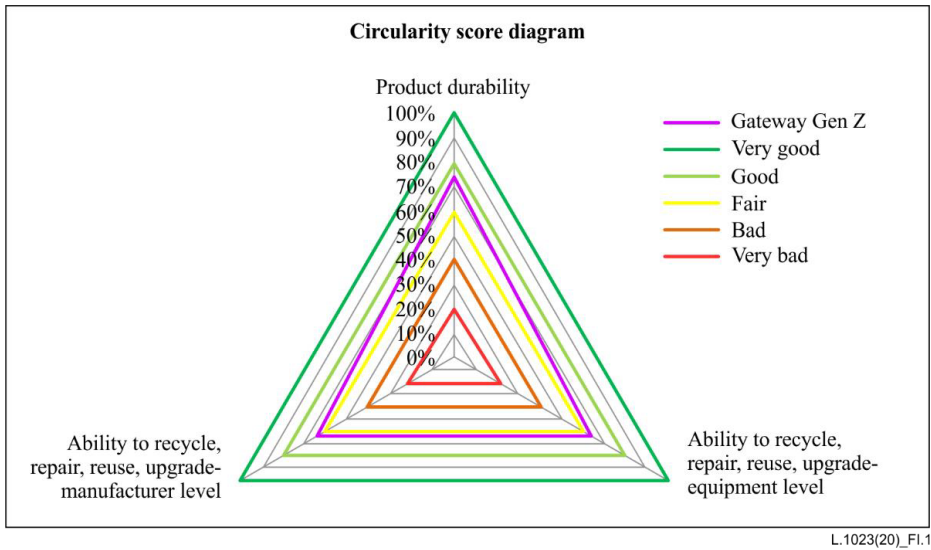

**Figure I.1 – Radar chart for the gateway according to group scores from Table I.6**

**I.2 Server example**

Table I.7 shows another suggestion for 3Rue8 MI levels for servers.

**Table I.7 – Suggestion for 3Rue8 MI levels for CRMs in servers**

3Rue8: Critical raw materials	Declaration of critical raw materials content	MI = 1 – Based on the CRM content assessment, design efforts have been carried out to substitute CRM.
		MI = 2 – An assessment has been carried out on the CRM content (cf. EN 45558).
		MI = 3 – Indicative weight range (less than 5 g, between 5 g and 25 g, above 25 g) at component level, of the at least two critical raw materials is available (cf. [b-EU 2019/424] for servers).
		MI = 4 – The CRM content is unknown.

## Appendix II

### Rationale for scoring tables

(This appendix does not form an integral part of this Recommendation.)

The first step of the approach is to fill a matrix of combinations with some pertinent values. To facilitate this process, 5 levels from A (the best score) to E (the worst score) are considered. Figure II.1 shows the completed matrix.

		R			
		1	2	3	4
MI	1	C	B	A	A
	2	C	B	B	A
	3	C	D	D	E
	4	D	D	E	E

L.1023(20)\_FII.1

**Figure II.1 – A to E matrix for MI and R**

The progression is linear from the lowest score to the highest (for example with the best scoring located in the top-left corner and the worst one in the bottom-right).

Then each level in a range of 20% is translated as followed:

- A = [100%; 80%]
- B = [80%; 60%]
- C = [60%; 40%]
- D = [40%; 20%]
- E = [20%; 0%]

Once again, the matrix is filled with appropriate score for each letter. (Figure II.2)

		R			
		1	2	3	4
MI	1	55	75	90	100
	2	50	60	70	80
	3	40	35	30	15
	4	25	20	10	0

L.1023(20)\_FII.2

**Figure II.2 – 0% to 100% matrix for MI and R**

Then a formula is derived that combines MI and R to reach the % scores in Figure II.2. As the progression of the scores in Figure II.2 is not linear the resulting equation (II.1) allowing calculation of each cell score is rather complex.

*Score for MI, R combination*

$$= \left( \left( \frac{1}{3} \times MI^3 - 2.5 \times MI^2 + \frac{25}{6} \times MI \right) \times R^2 + \frac{45}{MI} + 20.75 \right) \times \frac{100}{97.75} \quad (II.1)$$

*(expressed in %)*

By using equation (II.1) the Table Scores can be recalculated, as displayed in Figure II.3.

NOTE – If the range for R and MI is susceptible to be changed (e.g., someone wants to try a 1 to 5 range for both metrics) a new formula – to calculate the scores for the new combinations (e.g., [R=5; MI=5]) – is required.

In the current situation with fixed ranges for R and MI the scores in Figure II.2 could be considered directly.

		R			
		1	2	3	4
MI	1	70	76	86	100
	2	45	48	53	60
	3	35	32	27	20
	4	30	24	14	0

L.1023(20)\_FII.3

**Figure II.3 – 0% to 100% matrix for MI and R based on equation (II.1)**

## Appendix III

### Additional groups and criteria which may be relevant for certain ICT goods

(This appendix does not form an integral part of this Recommendation.)

Further groups and criteria examples may be developed which are only valid for a certain type of ICT good. Tools which is mentioned in [b-EN 45554] could be such an example outlined in Table III.1.

**Table III.1 – Guidance for identification of MI level for each criterion**

Group	Criterion	Guidance for identification of MI level of any ICT good	Scoring system (1-4) examples (to be adjusted according to product)
3RUE	3RUEIII.1: Tools	Tools required for repair operations per [b-EN 45554]	MI = 1 – Repair operations are feasible with no tools, basic tools, tools supplied with the product or spare part and/or product specific tools (as defined in [b-EN 45554]).
			MI = 2 – Repair operations are feasible with other commercially available tools (as defined in [b-EN 45554]).
			MI = 3 – Repair operations are feasible with proprietary tools (as defined in [b-EN 45554]).
			MI = 4 – Repair operations are not feasible with any existing tool (as defined in [b-EN 45554]).

## Bibliography

- [b-ITU-T K.21] Recommendation ITU-T K.21 (2019), *Resistibility of telecommunication equipment installed in customer premises to overvoltages and overcurrents.*
- [b-ITU-T L.1410] Recommendation ITU-T L.1410 (2014), *Methodology for environmental life cycle assessments of information and communication technology goods, networks and services.*
- [b-ITU-T L.Sup.28] Recommendation ITU-T L-series Supplement 28 (2016), *Circular economy in information and communication technology; definition of approaches, concepts and metrics.*  
<https://www.itu.int/rec/T-REC-L.Sup28-201610-I>
- [b-ETSI TS 103 199] ETSI TS 103 199 (2011), *Environmental Engineering (EE); Life Cycle Assessment (LCA) of ICT equipment, networks and services; General methodology and common requirements.*  
[https://www.etsi.org/deliver/etsi\\_ts/103100\\_103199/103199/01.01.01\\_60/ts\\_103199v010101p.pdf](https://www.etsi.org/deliver/etsi_ts/103100_103199/103199/01.01.01_60/ts_103199v010101p.pdf)
- [b-ETSI TR 103 679] ETSI TR 103 679 (2019), *Environmental Engineering (EE); Explore the challenges of developing product group-specific Product Environmental Footprint Category Rules (PEFCRs) for smartphones.*
- [b-EN 13429 ] EN 13429:2004, *Packaging. Reuse.*  
<https://www.en-standard.eu/bs-en-13429-2004-packaging.-reuse/>
- [b-EN 13430] BS EN 13430:2004 *Packaging. Requirements for packaging recoverable by material recycling.*  
<https://shop.bsigroup.com/SearchResults/?q=EN%2013430>
- [b-EN 45552] EN 45552:2020, *General method for the assessment of the durability of energy-related products.*  
<https://www.en-standard.eu/bs-en-45552-2020-general-method-for-the-assessment-of-the-durability-of-energy-related-products/>
- [b-EN 45553] EN 45553:2020, *General method for the assessment of the ability to remanufacture energy-related products.*  
<https://www.en-standard.eu/search/?q=EN+45553>
- [b-EN 45554] EN 45554:2020, *General methods for the assessment of the ability to repair, reuse and upgrade energy-related products.*  
<https://www.en-standard.eu/search/?q=EN+45554>
- [b-IEC 60529] IEC 60529:2001, *Degrees of protection provided by enclosures (IP Code).*  
<https://webstore.iec.ch/publication/2452>
- [b-IEC 60068-2-1] IEC 60068-2-1:2007, *Environmental testing - Part 2-1: Tests - Test A: Cold.*  
<https://webstore.iec.ch/publication/502>
- [b-IEC 60068-2-31] IEC 60068-2-31:2008, *Environmental testing - Part 2-31: Tests - Test Ec: Rough handling shocks, primarily for equipment-type specimens.*  
<https://webstore.iec.ch/publication/516>
- [b-IEC 61960-3] IEC 61960-3:2017, *Secondary cells and batteries containing alkaline or other non-acid electrolytes - Secondary lithium cells and batteries for portable applications - Part 3: Prismatic and cylindrical lithium secondary cells and batteries made from them.*  
<https://webstore.iec.ch/publication/29603>

- [b-IEC 62620] IEC 62620:2014, *Secondary cells and batteries containing alkaline or other non-acid electrolytes - Secondary lithium cells and batteries for use in industrial applications*.  
<https://webstore.iec.ch/publication/7268>
- [b-IEEE 1680.1] IEEE 1680.1 – 2018, *Standard for Environmental and Social Responsibility Assessment of Computers and Displays*.  
[https://standards.ieee.org/standard/1680\\_1-2018.html](https://standards.ieee.org/standard/1680_1-2018.html)
- [b-ISO 1043-1] ISO 1043-1:2011, *Plastics – Symbols and abbreviated terms — Part 1: Basic polymers and their special characteristics*.  
<https://www.iso.org/standard/50590.html>
- [b-ISO 1629] ISO 1629:2013, *Rubber and latices — Nomenclature*.  
<https://www.iso.org/standard/60242.html>
- [b-ISO 11469] ISO 11469:2016, *Plastics – Generic identification and marking of plastics products*.  
<https://www.iso.org/standard/63434.html>
- [b-ISO 14040] ISO 14040:2006, *Environmental management — Life cycle assessment — Principles and framework*.  
<https://www.iso.org/standard/37456.html>
- [b-ISO 14044] ISO 14044:2006, *Environmental management — Life cycle assessment — Requirements and guidelines*.  
<https://www.iso.org/standard/38498.html>
- [b-ISO 18064] ISO 18064:2014, *Thermoplastic elastomers — Nomenclature and abbreviated terms*.  
<https://www.iso.org/standard/65365.html>
- [b-ASTM D3363 – 05] ASTM D3363-05 (2011), *Standard Test Method for Film Hardness by Pencil Test*. ASTM International, West Conshohocken, PA.  
[www.astm.org](http://www.astm.org)
- [b-CENELEC] CENELEC. CEN/CLC/JTC 10. *Development of relevant standardization deliverables required by M/543*.  
[https://www.cenelec.eu/dyn/www/f?p=104:7:1254693255047501:::FSP\\_ORG\\_ID:2240017](https://www.cenelec.eu/dyn/www/f?p=104:7:1254693255047501:::FSP_ORG_ID:2240017)
- [b-EU 2019/424] Commission Regulation 2019/424 (2019), *Commission Regulation (EU) 2019/424 of 15 March 2019 laying down ecodesign requirements for servers and data storage products pursuant to Directive 2009/125/EC of the European Parliament and of the Council and amending Commission Regulation (EU) No 617/2013*.  
<https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX%3A32019R0424>
- [b-EMF] <https://www.ellenmacarthurfoundation.org/resources/apply/circulytics-measuring-circularity>
- [b-EPEAT] <https://greenelectronicscouncil.org/epeat-criteria/#freestandards>
- [b-EU-CRM] Communication from the Commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions on the 2017 list of Critical Raw Materials for the EU.
- [b-MIL-STD-810G] MIL-STD-810G (2008), *Department of Defense, Test Method Standard: Environmental Engineering Considerations and Laboratory Tests*.
- [b-MIL-STD-810H] MIL-STD-810H (2019), *Department of Defense, Test Method Standard: Environmental Engineering Considerations and Laboratory Tests*.



- [b-AndraeVaija] A.S.G. Andrae, M.S. Vaija, and S. Halgand, *Method for determining the Circularity Score of ICT goods*, International Journal Of Advanced Research in Engineering & Management (IJAREM), 6(1), 2020, 1-15.  
<http://www.ijarem.org/papers/v6-i1/1.IJAREM-D5113.pdf>
- [b-Bovea] Bovea, M.D. and Pérez-Belis, V. (2018) *Identifying design guidelines to meet the circular economy principles: A case study on electric and electronic equipment*. Journal of Environmental Management. 228: 483– 494. DOI:10.1016/J.JENVMAN.2018.08.014.  
<https://www.sciencedirect.com/science/article/pii/S0301479718308855>
- [b-PCI] Bracquené, E., Dewulf, W., & Duflou, J. R. (2020). *Measuring the performance of more circular complex product supply chains. Resources, Conservation and Recycling*, 154, 104608. DOI:  
<https://doi.org/10.1016/j.resconrec.2019.104608>
- [b-WBCSD] Circular electronics Roadmap, Scoping document 2019, WBCSD  
<https://www.wbcscd.org/Programs/Circular-Economy/Resources/A-New-Circular-Vision-for-Electronics>





## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
<b>Series L</b>	<b>Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant</b>
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems